


The following are Barrel Bayonet and Nozzle Thermocouples as per the custom configuration.


How to order :

- ▶ Thermocouple dimensions
- ▶ Type J or K
- ▶ Hot junction-Isolated or Non-isolated.
- ▶ Lead wire length
- ▶ Adjustable Spring type or not.

COMPRESSION FITTING

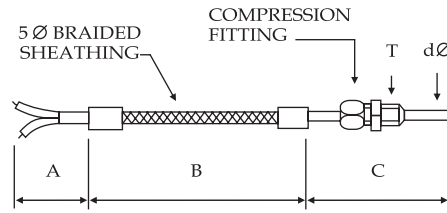


MODEL : AH-SCF

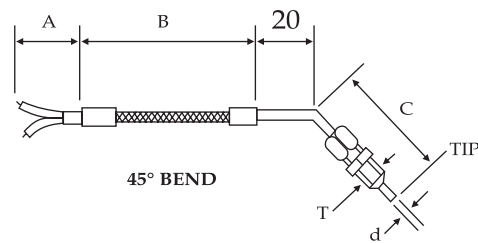


MODEL : AH-45 CF


BAYONET FITTING

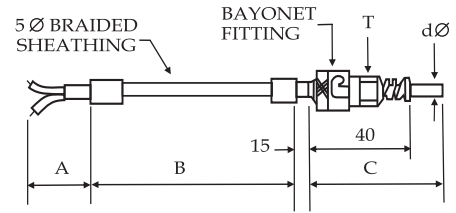


MODEL : AH-SBF

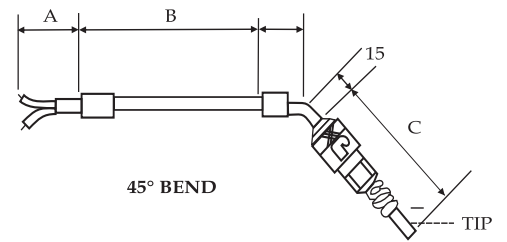

MODEL : AH-45 BF

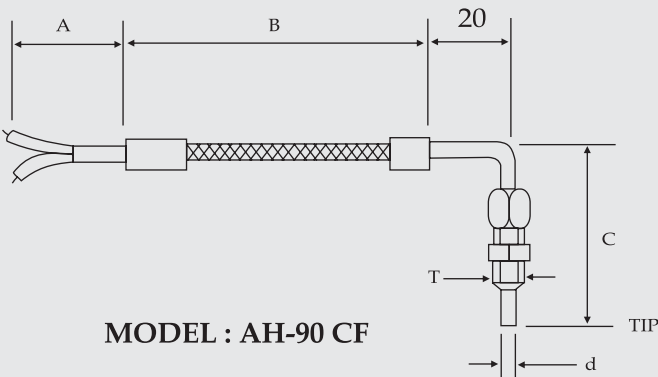

MODEL : AH-90 CF

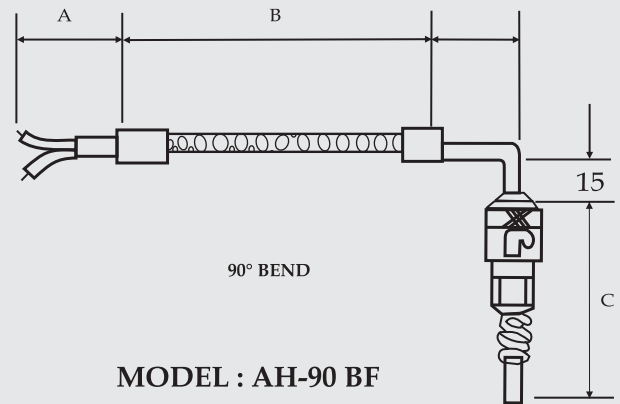

MODEL : AH-90 BF

NOTE : PLEASE MENTION TIP LENGTH (MM) FOR EACH THERMOCOUPLE.

STANDARD : T=1/8" BSP OR 1/4" BSP AND d + 3/16" Dia OR 1/4" Dia

NOTE : FOR THERMOCOUPLE WITHOUT FITTING DELETE F IN MODEL NUMBER

Hot Runner MI Thermocouples Manifold Thermocouples



- ▶ **MI Thermocouple** : Available in dia 1mm, 1.5mm, 1.6mm, 2mm, 3mm, 4.5mm & 6mm.
- ▶ **Length** : Starting from 25mm onwards.
- ▶ **Manifold Thermocouples** : Available in Ring type, Washer type 4mm, 5mm, 6mm holes, Block type or Custom designs.
- ▶ Manifold RTD PT 100's also available in selected design.
- ▶ Custom design available.